

#### Polished Stainless Steel Surface Roughness of 0.8µm



ISO 9001: 2015

FDA APPROVED

**CE MARK** 







ATEX

TR CU

EUROPEAN COM REGUL 1935/2004/EC







### Features and Benefits

- New generation PTFE diaphragms of embodied type for long-life operation (compound) FDA Approved
- New generation EPDM diaphragms with embodied inner-outer piston FDA Approved
- Polished Stainless Steel Surface Roughness of 0.8µm
- Advanced quality Full capacity PTFE-A diaphragms FDA Approved
- RubyShine Pumps have been engineered to meet FDA CFR 21.177, 1935/2004/EC, ATEX, and CE.
- Economical air consumption, ecological designing
- Standard connections Tri-Clamp ISO
- One-piece manifold

# RubyShine composition codes

Model	Pump Body	Center Section	Diaphragms	Ball Seats	Valve Ball	0-ring
RubyShine 115 DN 25 Tri-clamp	SL: Stainless Steel 316 Ra O8µm	W: PP AN: Alu Nickel Plated	Z: PTFE A+back up (EPDM Conductive) T: PTFE+back up E: EPDM Conductive	<b>S:</b> AISI 316	T: PTFE S: AISI 316	T: PTFE



RubyShine Air operated diaphragm pneumatic pumps are manufactured under FDA requirements. All materials in contact with the liquid comply to FDA CFR 21.177, 1935/2004/EC regulations. The whole range is in AISI 316 Polished Stainless Steel Surface Roughness of  $0.8\mu m$ . Additionally, PTFE and EPDM diaphragms are of new technology (Compound) with integrated piston.



# Ruby Innovative oil free air valve

The heart of the RubyShine pump is our innovative, new design air valve. In respect for New Era demands, to create and offer High Quality product, with high interest for the environment and it's protection, the Air Valve of the RubyShine Diaphragm Pumps has been created to offer

- Oil free operation
- No need for maintenance
- Not affected by minor contamination of compressed air
- Significant energy saving
- Non freezing operation
- External environment operation
- No dead centre
- Long life
- Reliability






# Advance unified diaphragms featuring:

- Easy installation and maintenance
- Excellent service life
- Inventory cost reduction
- Improved performance
- Greater displacement per cycle
- No center hole, elimination of potential leak paths.
- There is no need for the main axis to be insured
- They can be screwed and unscrewed without the use of tools



# Advance Unified Diaphragm offers:

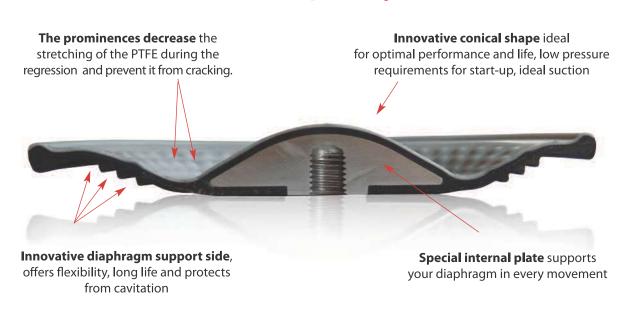




### Technical data

ATEX certification	STANDARD: II 3G Ex h IIB T4 Gc - II 3D Ex h IIIB T135°C Dc CONDUCT: II 2G Ex h IIC T4 Gb - II 2D Ex h IIIB T135°C Db		
Pump Body	Stainless Steel 316 Mirror Polish		
Diaphragms	EPDM Conductive		
	Compound PTFE+Back up EPDM conductive		
	Compound PTFE A + Back up EPDM conductive		
Suction / Discharge Connection	DN 25 tri-clamp		
Air connection	1/2"		
*Max. self-priming capacity	3 m		
*Max. flow rate	72 l/min		
Max. head	80 m		
Max. air supply pressure	8 bar		
Max size of solids	3,0 mm		
Max. operating temp.	95°C		
Weight AISI 316	9 kg		

<sup>\*</sup> The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.


## **Performance**

### **FULL CAPACITY PTFE - A FITTED**

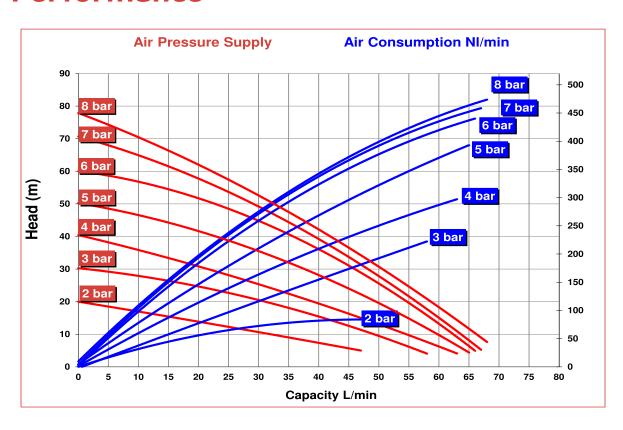





### PTFE FITTED

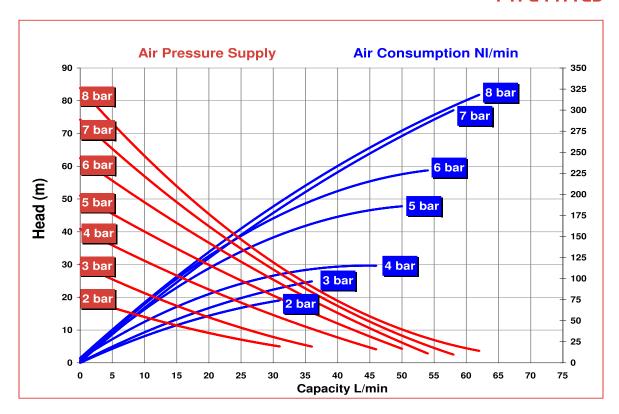


### **EPDM FITTED**

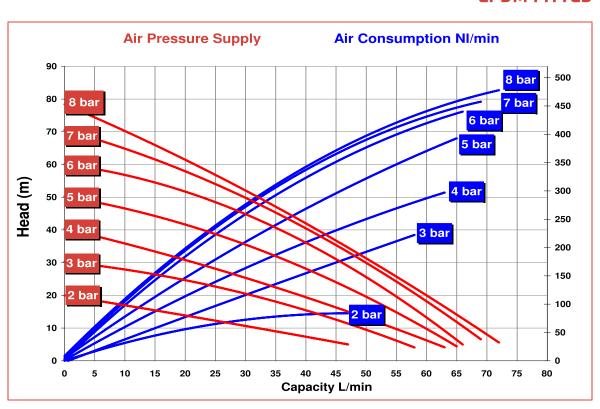

# **Dimensions**

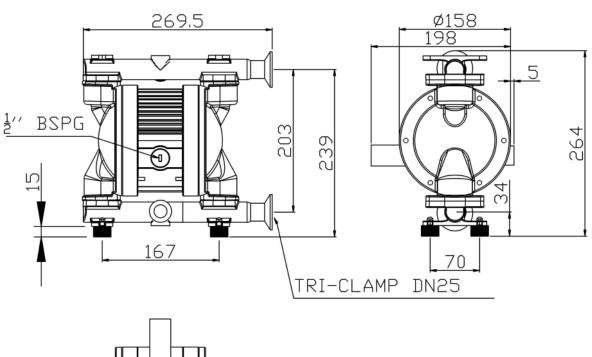











Headquarters / Factory
Inofita Industrial area
59th km Nat.Road Athens - Lamia
GR 320 11 Inofita Viotia, Greece
Tel: +30 215 215 9520, +30 215 215 9580
email: sales@alphadynamic.eu
www.alphadynamic.eu